


ENGINEERING
YOUR SPRAY SOLUTION



NEW!

First belt lubrication nozzle made entirely from plastic

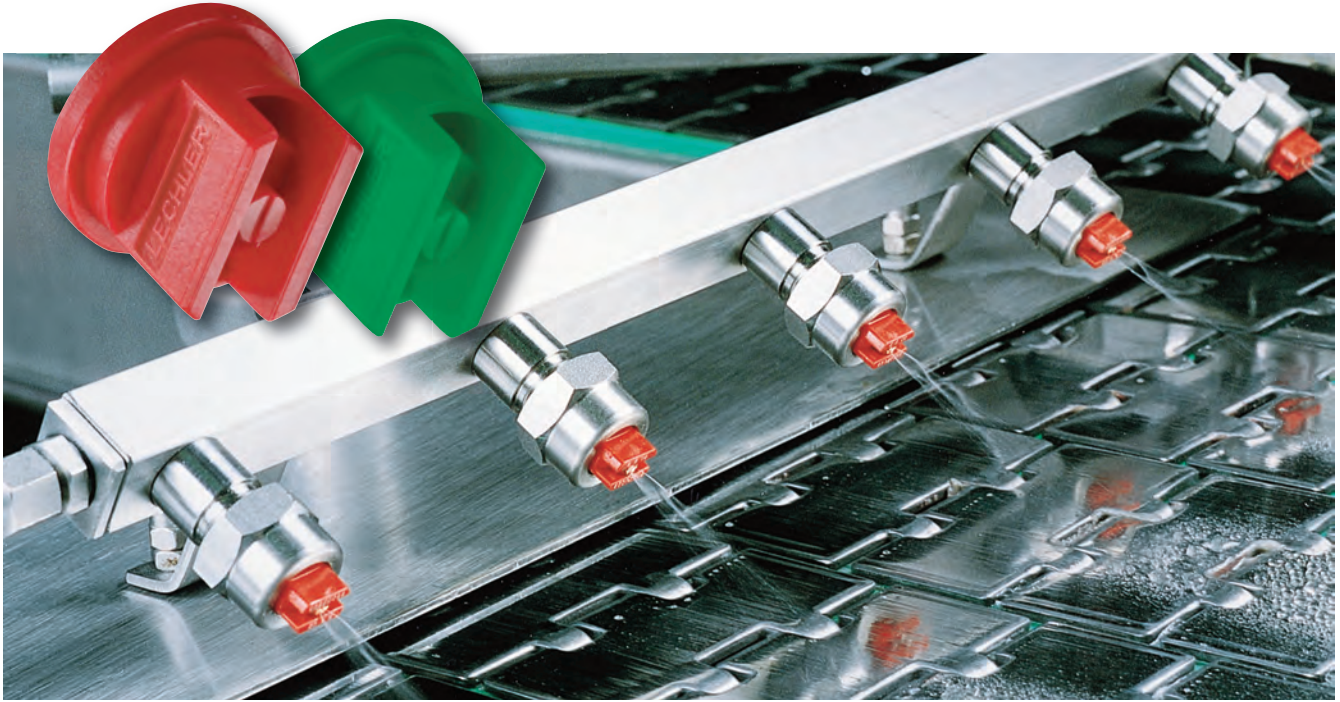

Material
POM



Flow rate
0.10 l/min at 3 bar ■
0.06 l/min at 3 bar ■



Spray angle
75° at 3 bar



Connection
Assembly with 3/8" lock nut

The one-piece solid plastic nozzle from Lechler. A low cost nozzle alternative for belt lubrication.

Advantages

- Provides economical savings through mold injection process.
- Interchangeable with existing design components. (Nipple and locknut)
- Very low flow rates

Applications

- Belt lubrication
- Low flow cleaning or lubricating

Ordering number: 652.185.56.03 ■

Ordering number: 652.145.56.03 ■



For more information visit our website

www.lechler.com/beltlubrication